


VINCOM GRAND PARK L5-17 | BOH ENTRANCE 3D

Whole-store cutaway / staff-only rear entry / concept revision 31

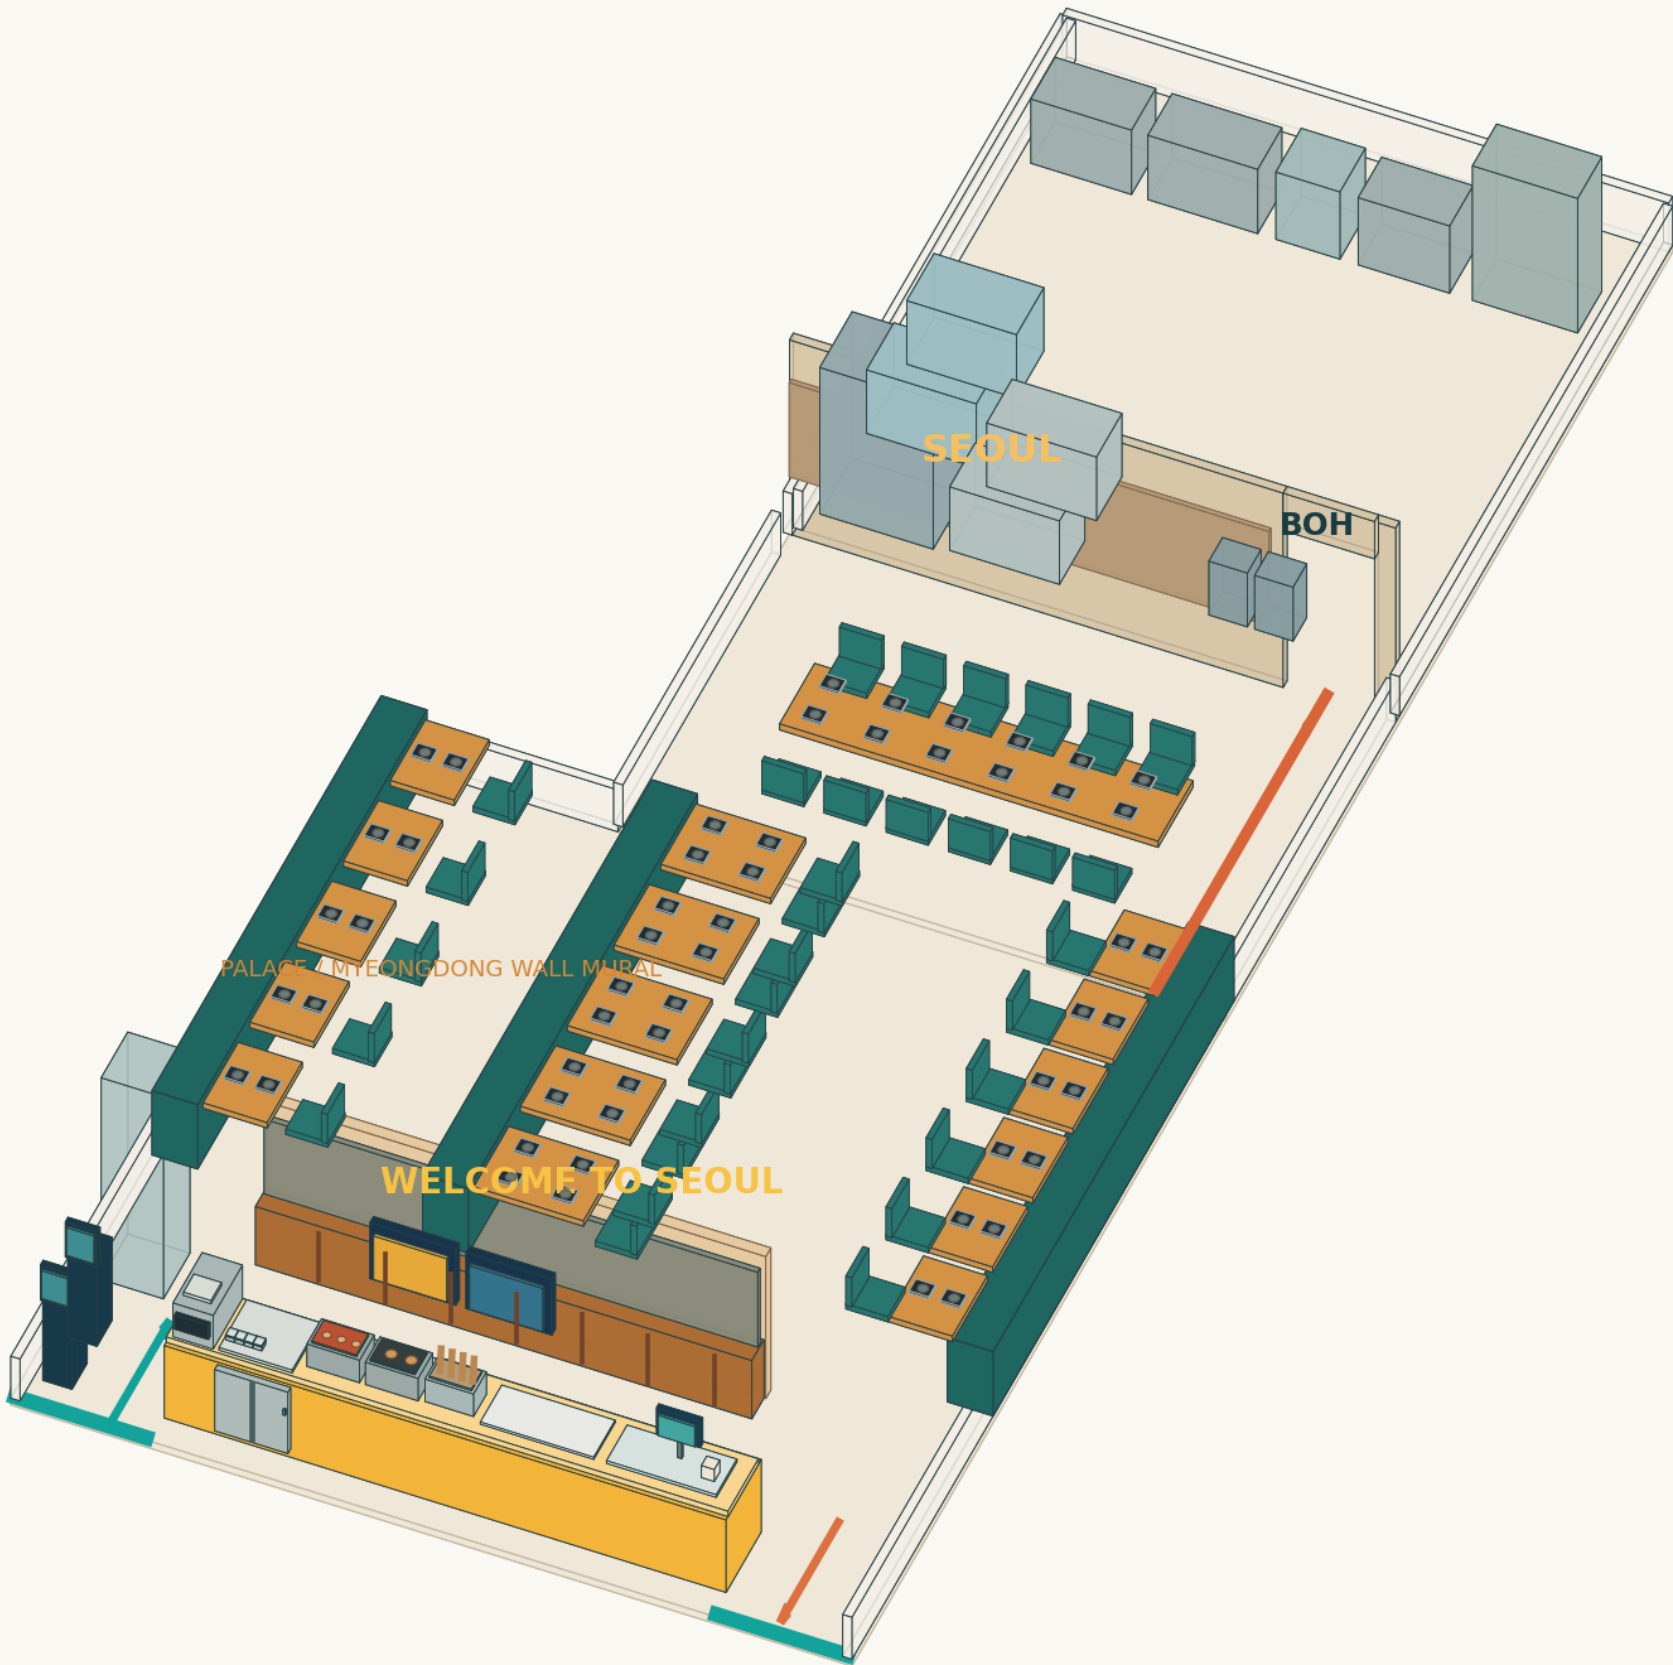

ENTRY + BOH ENVELOPE

- BOH: 6.63 x 7.105 m = 47.1 m2 gross
- Staff opening: 1.00 m, east end of rear wall
- Entry wall at y=13.945 m from storefront
- Door x=7.97 to 8.97 m on 9.20 m axis
- Orange route: right aisle to staff threshold
- Rear feature wall stops before the doorway
- No second performance cooking counter at rear
- Front left order / right pickup remain separate

BOH equipment footprints

- HWA-45CR 1240 x 830 mm
- HWA-1200TRG x2 1200 x 700 mm
- Prep / wash / dry / lockers
- TML01 x2, 420 x 350 mm

REAR DINING | VISIBLE STAFF ENTRY

Perspective from the dining room toward the BOH threshold




Autumn mural left / Seoul rear feature / winter mural right; individual induction shown at each seat.

Atmosphere rendering. The dimensioned cutaway on page 1 controls the doorway location.



VINCOM GRAND PARK L5-17 | BOH 3D REV24

6,630 mm x 7,104 mm planning envelope = 47.1 m2 gross allocation; equipment footprints to scale

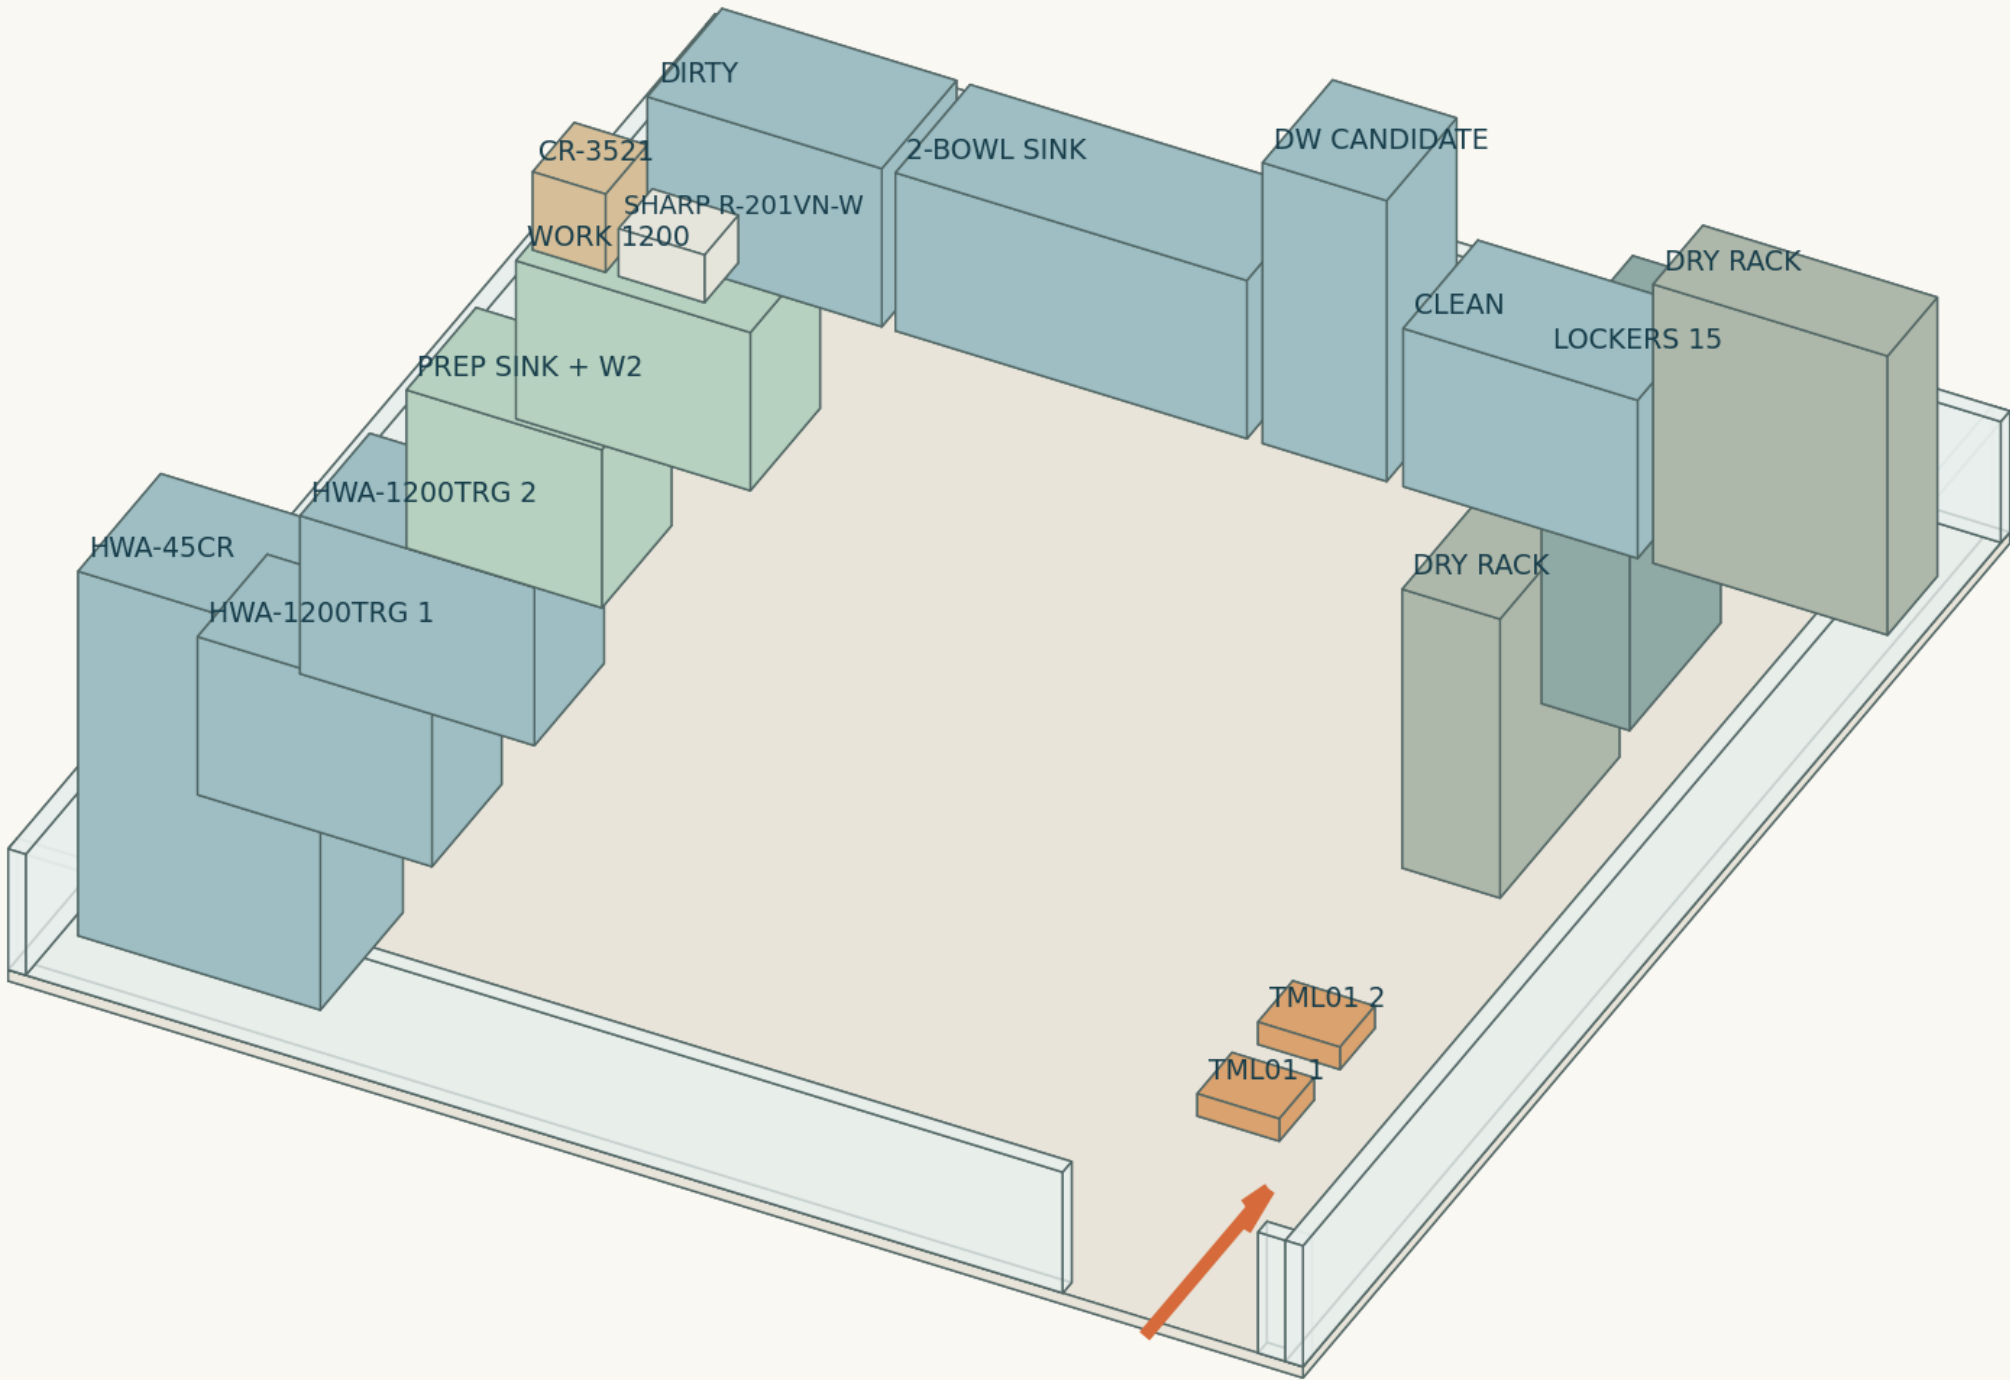

BOH ZONES

HWA-45CR 1240 x 830

HWA-1200TRG x2 1200 x 700

Kanawa TML01 x2 420 x 350

CR-3521 373 x 418 / Sharp 440 x 338

Dirty > sink > DW > clean > dry

East-side staff access

WHAT 47.1 m2 MEANS


The 47.1 m2 is gross allocated area.

Equipment bodies use recorded footprints; the dishwasher is a candidate, not a confirmed equipment purchase. Door swing, service clearances and wall thickness must be overlaid before claiming capacity.

No separate manager/break rooms fit here.

BOH REVERSE VIEW | ACTUAL EQUIPMENT FOOTPRINTS

Vincom L5-17 concept + company equipment master; schematic elevations and conceptual positions

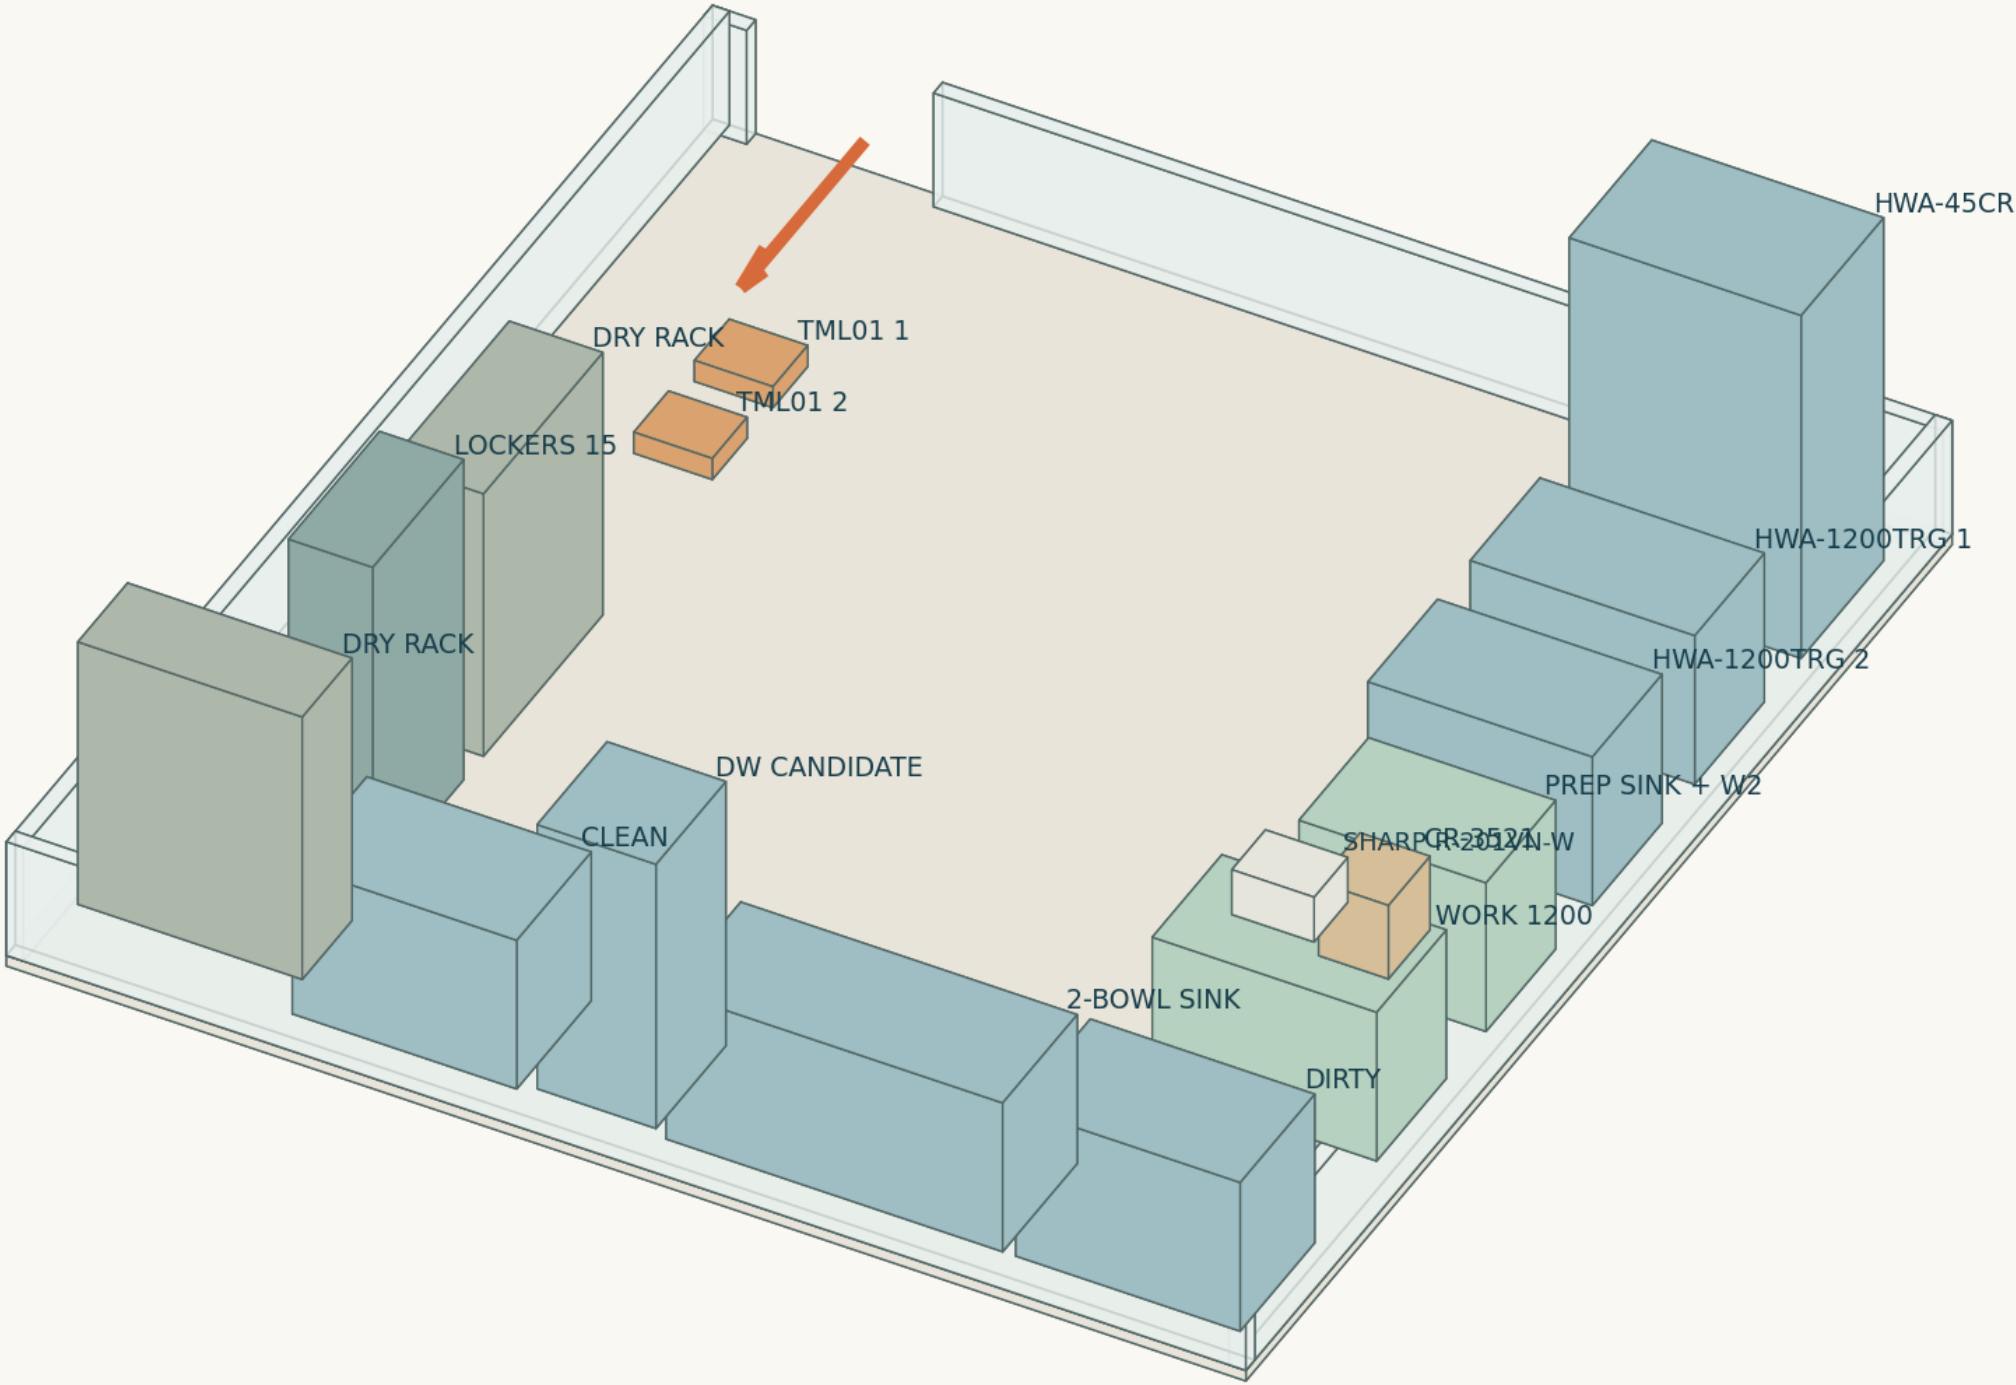

AREA CHECK

Width 6.630 m
Depth 7.104 m
Gross 47.1 m2
Central open floor, access TBD

VERIFY ON SITE

- Net clear area after walls
- DW exact model / service clearances
- Door and egress status
- Power, water, drainage, air